



M850 Wild Full Suspension

SKU	EBM850FSPRM
EAN	5608554013030
SIZE	M
AVAILABLE SIZES	M L S
COLOR	PURE RED
AVAILABLE COLORS	DARK NIGHT , PURE RED



POWER
Allow the powerful performance of the SHIMANO EP800 85Nm motor to propel you forward, unlocking a realm of exhilarating adventures and uncharted territories to explore. Embrace the thrill of uncovering the wonders that lie beyond the next mountain peak.



CONTROL
With the mullet configuration, you get the best of a 29" wheel in the front, offering control and stability, and the best of a 27.5" wheel in the back, providing traction and comfort.



PERFORMANCE
Experience the unmatched performance of the M850, thanks to its full suspension system that effortlessly absorbs impacts with excellent comfort, delivering maximum performance on the mountain. Enjoy maximum control thanks to its sturdy aluminum frame, go and conquer it all!



AUTONOMY
Enjoy the mountain adventures for longer with less effort thanks to the efficient SHIMANO combination, motor EP800 85Nm and 630Wh 36V battery. Estimated autonomy of 40 to 100km depending on user's weight, road conditions or altitude range.

PRODUCT INFORMATION

FRAME SIZES
S (38cm) - M (42cm) - L (46cm)
WEIGHT
Approx. 26kg
MAXIMUM BIKE & RIDER WEIGHT
135kg
PAINTING
Powder painting scratch resistant with Glossy Varnish
COLOUR(S)
Dark Night with gloss finish Pure Red with gloss finish

FRAME

FRAME
MTB FS Full Aluminium 150mm
HEADSET
ACROS AZX-581 1.5" SHIS With Blocklock 150° Integrated Cables
SUSPENSION
Rockshox 35S Air Travel 150mm Axle Boost 110mm 29"
REAR SHOCK
ROCKSHOX Deluxe Select+ Travel 150mm Trunnion (205x57,5)

E-BIKE SYSTEM

DRIVE UNIT
SHIMANO Steps EP800 85Nm
BATTERY
630Wh 36V - Integrated on Downtube - Removable
RANGE
40km to 100km
BATTERY LOCK KEY
Yes
CHARGER
2A - 6 to 8 hours total charge time
DISPLAY
SHIMANO SC-E7000

COCKPIT

HANDLEBAR
AL 780mm / 31.8mm / Rise 20mm (Straight)
STEM
AL 40mm - 31.8mm - 0°
GRIPS
VP VPG 122A

WHEELSET

TYRES
CONTINENTAL MountainKing 27,5"x2,6" / TrailKing 29"x2,4" (Rear Tyre Tubeless Ready)
WHEEL SIZE
Mullet: 27,5" / 29"
RIMS
Alloy Double Wall Front: 30mm/ Rear: 35mm (Tubeless Ready)
SPOKES
Black Stainless Steel
FRONT HUB
Boost 110 Thru-axle 15mm
REAR HUB
Boost 148 Thru-axle 12mm

DRIVETRAIN & BRAKES


BRAKES
SHIMANO Hydraulic MT520
BRAKE ROTOR - FRONT
SHIMANO SM-RT30 203mm
BRAKE ROTOR - REAR
SHIMANO SM-RT30 180mm
REAR DERRAILEUR
SHIMANO Deore 11S

CASSETTE
SHIMANO Deore 11S 11-51T
SHIFTERS
SHIMANO Deore 11S
CHAINRING
MIRANDA ChainFlow 3D BCD104 36T
CRANK
SHIMANO FC-EM600 165
CHAIN
KMC e11 Turbo e-bike series
CHAINGUARD
Yes - GW

SAFETY & ACESSORIES

FRONT LIGHT
LITEMOVE SE-110 with reflector 110 Lux
BOTTLE CAGE
FIDLOCK Twist
SADDLE
SELLE SAN MARCO GND
SEAT POST
KindShock Dropper Post Lev Integra Travel 150mm
SEAT CLAMP
Alloy black with screw
PEDALS
MARWI SP-400 Flat with reflectors

A	Seat Tube Length	420
	Top Tube Length	586
B	Top Tube Horizontal	625
C	Head Tube	110
D	Chain Stays	455
E	Head Tube Angle	66.5°
F	Seat Tube Angle	75°
G	Wheelbase	1229
H	Reach	460
J	Stack	617
	BB Drop	22

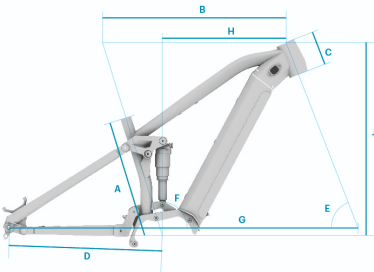

Note: The following numbers are for reference only. Correct air pressure must be adjusted by the individual rider while checking the sag.
RIDER WEIGHT AIR SETTING <55 Kg <80 psi 55-63 Kg 80-100 psi 63-72 Kg 100-115 psi 72-81 Kg 115-130 psi 81-90 Kg 130-145 psi >90 Kg 145+* psi

*do not exceed 195 psi